

Longwood University Sign Standards

Type	<u>Page</u>
Exterior Post-Mounted	2-3
Exterior Wall-Mounted	4
Parking Lot	5

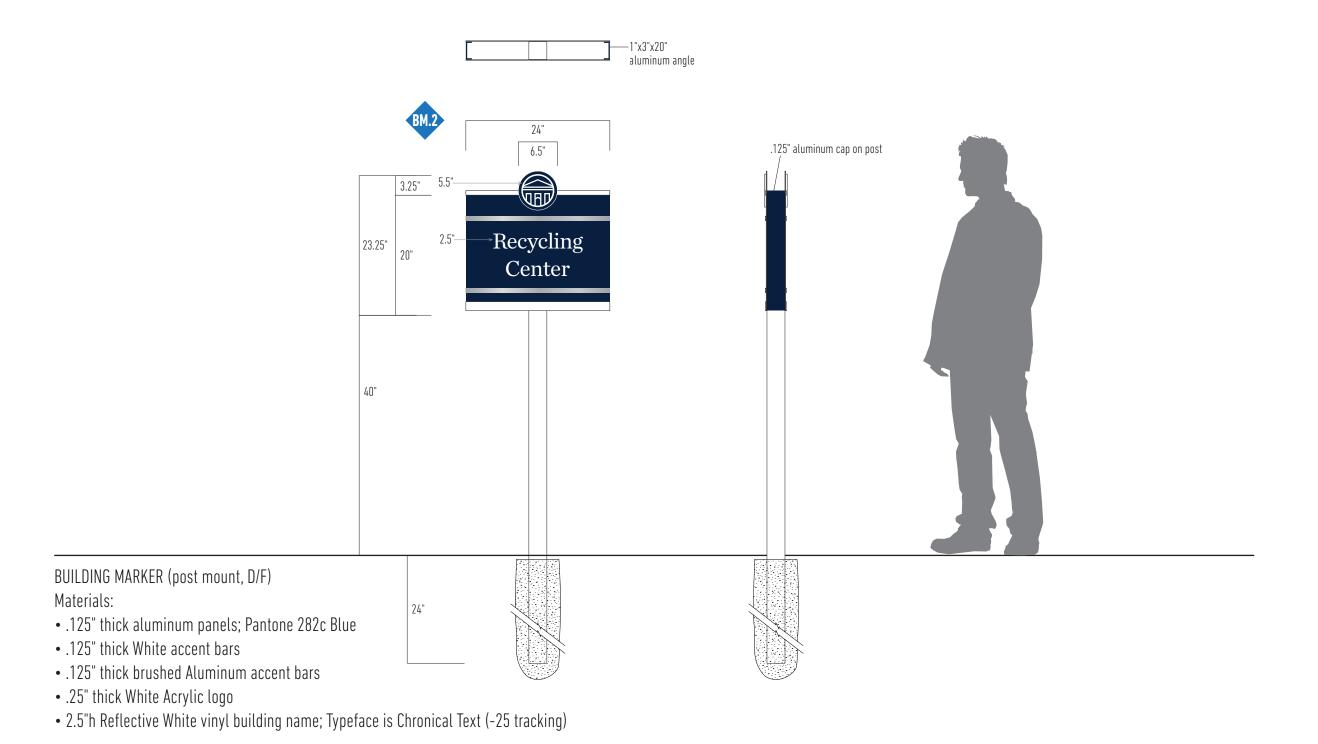

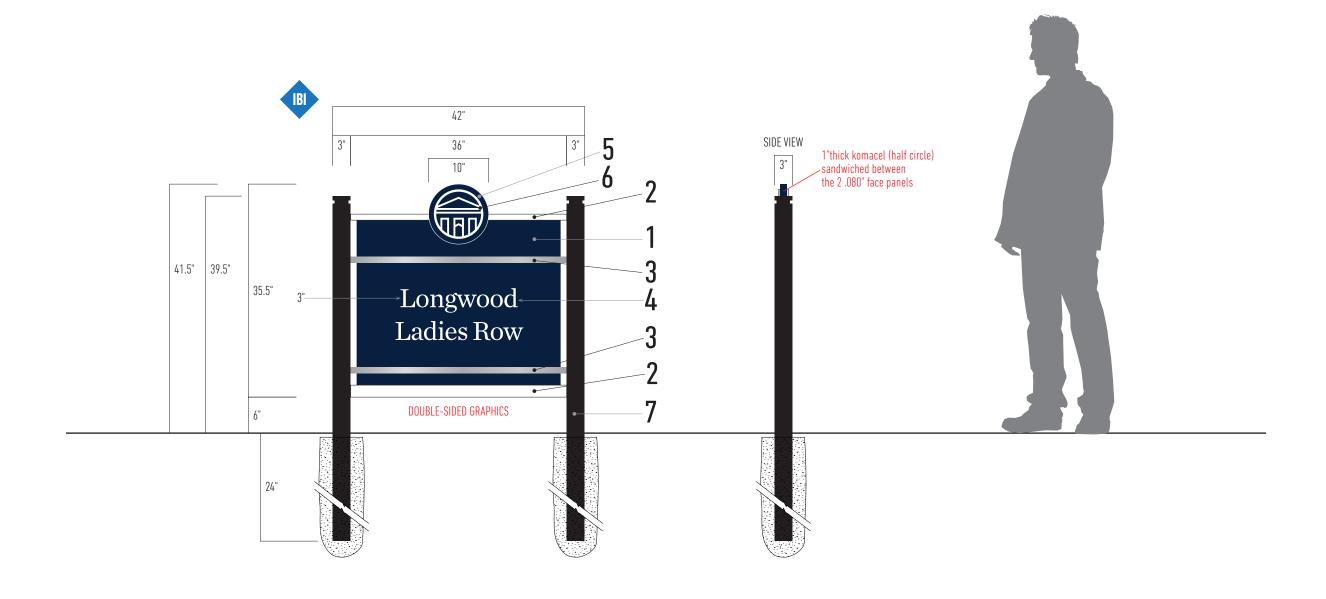

CONSTRUCTION:

- 1: 1" Aluminum tube frame with .080" thick aluminum faces; Painted all surfaces; Mounts inside the 2 posts and held in place via
- 2: .040" thick White Aluminum; Mount to component 1 via exterior clear film adhesive
- 3: .040" metal laminate; Mount to component 1 via exterior clear film adhesive
- 4: Surface applied Vinyl Graphics; Typeface is Chronical Text (-25 tracking)
- 5: .125" thick Aluminum (circle); Surface paint face/returns; Mount to component 1 via exterior clear film adhesive
- 6: .25" White Opaque Acrylic; Mount to component 5 via exterior clear film adhesive
- 7: 3" square aluminum posts w/ routed PVC caps; Painted all surfaces

MOUNT: min. 24" below grade, earth bury, concrete fill LOCATE:

Mounting Location: per client Mounting Height: as shown

COLORS:

- 1: Pantone 282c Blue
- 2: White (factory finish) 3: Anodized Clear Bright Brushed Aluminum
- 4: Reflective White
- 5: Pantone 282c Blue
- 6: White (integral)
- 7: Black



BUILDING MARKER (wall mount)

Materials:

- 1" thick aluminum cabinet; Pantone 282c Blue
- .125" thick White accent bars
- .125" thick brushed Aluminum accent bars
- .25" thick White Acrylic logo
- 2.5"h Reflective White vinyl building name; Typeface is Chronical Text (-25 tracking)

